

## Heavy Duty Umbrellas



**ARCHER SETTINGS WITH UMBRELLA**



**MONTEREY SETTINGS WITH UMBRELLA**



**CONROD DOUBLE SETTING WITH UMBRELLA**



## Heavy Duty Umbrellas

### OPTIONS AVAILABLE:

- Square or Octagonal shape
- Centre or Side post
- Various sizes and colours
- 100% Acrylic or

### SPECIFICATIONS:

- 99% sun blockout
- Mold and mildew resistance
- UV ray reflective coating
- Optional logo - P.O.A.


### INSTALL TYPE:

- Bolt down
- Inground


NB: Installation through existing **synthetic grass**, repairs will be carried out but will be unable to match existing quality.

NB: Installation through existing **soft-fall**, repairs will be carried out but will be unable to match existing colour.

### ACRYLIC FABRIC COLOURS

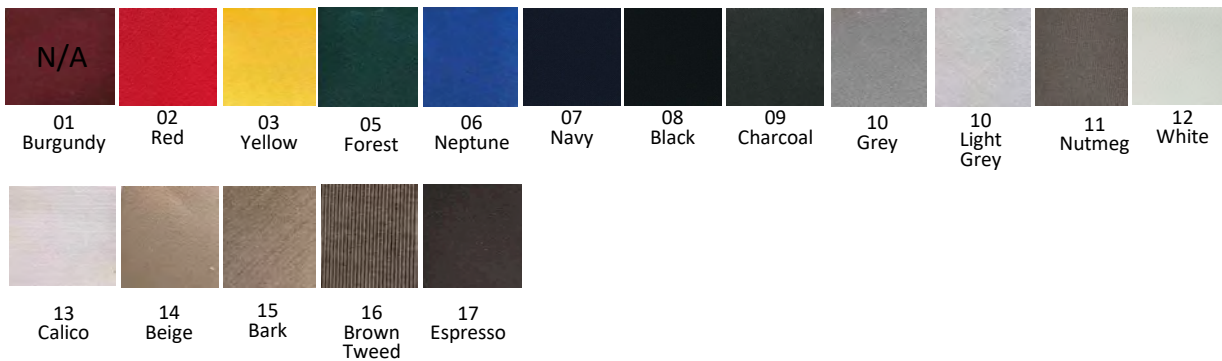

### PVC FABRIC COLOURS

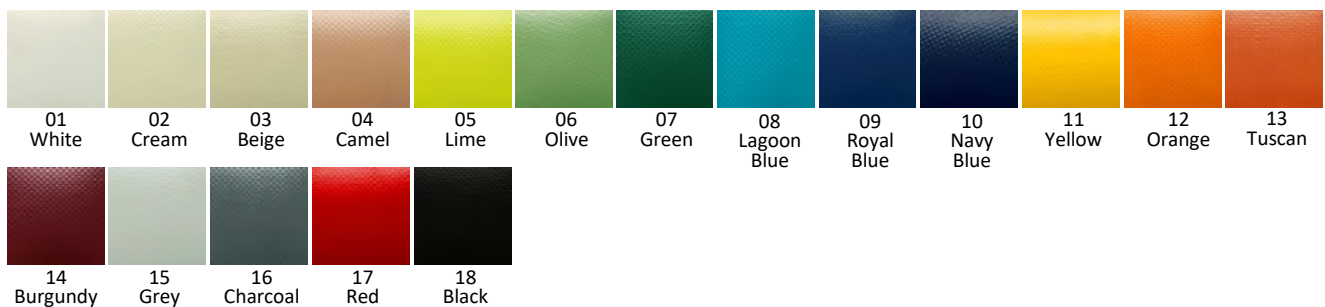

### FRAME COLOURS



Colours shown are for illustrative purposes only.



**SCULLY OUTDOOR DESIGNS AUSTRALIA PTY LTD**

ABN: 12 165 652 504

Ph: 02 9531 4166

Address: 7D/1-3 Endeavour Rd, Caringbah NSW 2229

Mail: PO Box 2074 Caringbah NSW 2229

Web: [www.scully.net.au](http://www.scully.net.au)

Email: [info@scully.net.au](mailto:info@scully.net.au)

## ULTRASHADE HEAVY DUTY UMBRELLAS

### FABRICS:

#### 100% Acrylic Outdoor Awning Fabric

- 99% Blockout – UV Reflective
- Water Resistant
- Fade, Mould & Mildew Resistant

#### Ferrara 502 PVC Coated Polyester

- Lacquer Finished
- 100% Blockout – UV Reflective
- Waterproof
- Fade, Mould & Mildew Resistant

See charts for available fabric and frame colours

- ✓ 5-year warranty on frames
- ✓ 2-year warranty on canopies
- ✓ Removable handle system for public settings
- ✓ Marine grade stainless steel fittings and bases
- ✓ 80 km/h Wind Rated

Pole Diameter: 82.5mm x 5.2mm  
Arms Section: 25 x 50 x 3.2mm  
Mechanism: Racks and Pinion Gearbox  
Frame Material: Aluminium  
Finish: Powder Coated

Bases: Bolt Down OR Inground

### GUARANTEES:

Frames – Five (5) Years  
Canopies – Two (2) Years



SCULLY OUTDOOR DESIGNS AUSTRALIA PTY LTD

ABN: 12 165 652 504

Ph: 02 9531 4166

Address: 7D/1-3 Endeavour Rd, Caringbah NSW 2229

Mail: PO Box 2074 Caringbah NSW 2229

Web: [www.scully.net.au](http://www.scully.net.au)

Email: [info@scully.net.au](mailto:info@scully.net.au)

## ULTRASHADE HEAVY DUTY UMBRELLAS OPEN / CLOSE INSTRUCTIONS

### TO OPEN

1. Whilst lightly holding one of the long arms out, gently push out the internal small arms
2. Each of the small internal arms need to be gently pushed out together
3. The umbrella should unfold most of the way by itself.
4. Bolt the handle to the round stainless-steel axle and wind up.
5. Open the umbrella until the canopy is as **taut as possible**.
6. Secure by placing the locking pin into the round stainless-steel axle and into the post
7. Remove the handle and store it in a safe place.

**PLEASE ENSURE THAT THERE IS NO LOOSENESS IN THE CANOPY AS IT CAN BECOME DAMAGED IF THE CANOPY IS NOT TAUT! EG. BEING STRESSED FRACTURED FROM FLAPPING.**

### TO CLOSE

1. Attach the handle to the round stainless-steel axle.
2. Release pressure on the locking pin.
3. Remove the locking pin.
4. Wind the umbrella down.
5. Ensure all the canopy material is **not jammed** between:
  - The arms and arm brackets
  - The arms and the bottom casting 600mm from the top of the main pole.

**NOTE: MAKE SURE THERE IS NO FABRIC JAMMED BETWEEN THE ARMS.  
IF ALL FABRIC IS NOT CLEAR, DAMAGE TO THE CANOPY MAY OCCUR!  
ANY SUCH DAMAGE IS NOT COVERED BY THE WARRANTY!!**

1. Wrap all the canopy material around the umbrella in the same way you would for a rain umbrella.
2. Secure with the strap supplied.
3. Remove handle and store it in a safe place.

**NOTE: YOU MUST SECURE THE PANELS WITH THE STRAP PROVIDED.  
FAILURE TO SECURE WITH THE STRAP MAY RESULT IN DAMAGE TO THE CANOPY.  
ANY SUCH DAMAGE IS NOT COVERED BY THE WARRANTY!! IF THE UMBRELLA IS LEFT IN THE DOWN POSITION FOR ANY LENGTH OF TIME, EG: MORE THAN 24 HOURS, THE WIND MAY CAUSE FLAPPING OF THE PANELS WHICH WILL CAUSE THE FABRIC TO STRESS FRACTURE. ANY SUCH DAMAGE IS NOT COVERED BY THE WARRANTY!!**